
UPHOLSTERY

Heavy Duty Cordura Seat Bottom Upholstery # 990221

Item	Description	Qty
1	CX-14 Heavy Duty Cordura Seat Bottom	1

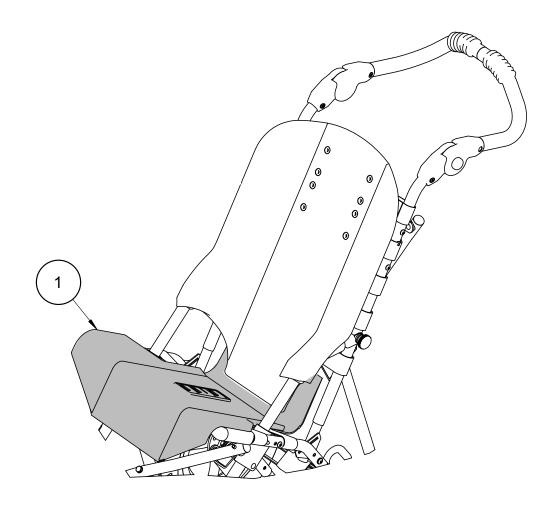

INSTRUCTIONS

Fabric Removal Instructions

- Partially fold the chair to relieve fabric tension (see fold instruction on page 4 in User Guide). The lower seat panel is attached to the back panel with velcro. Remove Velcro® from the top of the seat bottom. Press grey detent pin at the end of the seat extension, and take off upholstery.
- 2. To remove the top portion of the seat, remove the Velcro[®] straps that attach the seat Upholstery to the frame,and take off upholstery. Lift fabric off seat tubes and away from upper handles. The seat-reinforcing strap should remain on frame.

